

F-FULL CAPACITY UNITS - 8 MODELS

TWO MOUNTING STYLES: HORIZONTAL AND VERTICAL

- Full Capacity Units Offer Ergonomic Solutions For Employee Fatigue, Efficiency & Workplace Safety.
- They Offer A Wide Range Of Capacities: 10-1200 Lbs.
- Least Expensive - Fewest Moving Parts
- Cable & Seals Easily Changed In The Field
- Made To Order Travels From 1' to 15' Or More
- **CHECK OVERALL LENGTH BEFORE ORDERING - SEE OTHER UNITS FOR SPACE SAVING.**

VERTICAL BAL-TROL®



Consider This When Selecting Vertical Model: Available Vertical Mounting Space Requires High Ceilings

FV01-4-S shown

Important Tips When Selecting FH or FV Units

BAL-TROL® HORIZONTAL


B
V
A
E
L
R
T
T
R
I
O
C
L
A
L
®
L

Check Your Mounting Space

B
V
A
E
L
R
T
T
R
I
O
C
L
A
L
®
L

Check For Obstacles

HORIZONTAL BAL-TROL®

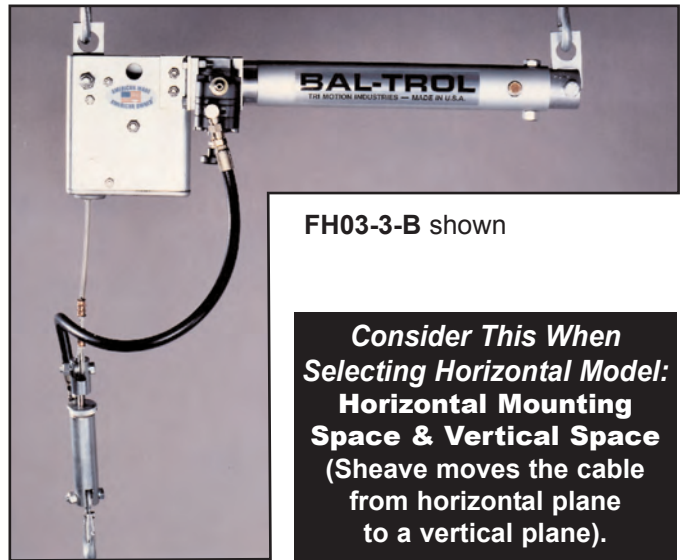

FH03-3-B shown

Consider This When Selecting Horizontal Model: Horizontal Mounting Space & Vertical Space (Sheave moves the cable from horizontal plane to a vertical plane).

LOAD CAPACITY			
MODEL	BORE SIZE Inches	@ 80 PSI	@ 100 PSI
50	1	50 LBS.	65 LBS.
01	1-1/2	100 LBS.	125 LBS.
02	2	200 LBS.	250 LBS.
03	2-1/2	300 LBS.	375 LBS.
06	3-1/4	600 LBS.	750 LBS.
08	4	800 LBS.	1000 LBS.
12	5	1200 LBS.	1500 LBS.

Examples:

Model - FV02-4-S

Full Capacity Units, Vertical, 200 lbs. Capacity, 4 ft. of travel, Sensi-Touch® Control indicate "S" or "SL" (SEE PAGE 3).


CHECK UNITS OVERALL LENGTH

Model - FH02-5-B

Full Capacity Units, Horizontal, 200 lbs. Capacity, 5 ft. of travel, Balance Control Package.(SEE PAGE 5).

CHECK YOUR HORIZONTAL & VERTICAL DIMENSIONS. SEE PAGE 14.

HOW TO ORDER FULL CAPACITY UNITS



FH08-3-S Full Capacity, Horizontal Mounting, 800 lb. Capacity @ 80 PSI, 3 ft. of travel, with Sensi-touch® Control.